


RXR Models – General Assembly Instructions for 60ft RXR Racing Hauler TOPPER

(Parts and/or photos may vary depending on specific model)

DO NOT PRINT THESE INSTRUCTIONS ON CARD STOCK PAPER!

Print these pages on standard copy paper, then switch to card stock for the model parts only.

Print design pages on a good “Card Stock” or “Tag Board” type paper. The model can be done on conventional 20lb copier type paper of course, but thin paper will not hold shape very well and the assembled model will be very “wobbly”. A good heavy card type paper will be easier to construct, provide cleaner lines, and make a good sturdy model.

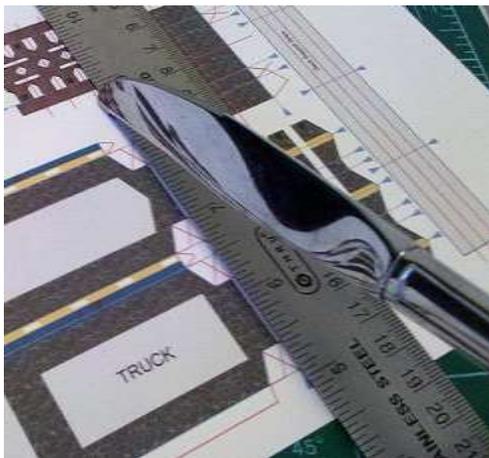

Score all Blue lines prior to cutting parts from sheet. This can be done with any blunt blade, like a dull butter knife, or other thin blade that will not cut the paper. Use a metal ruler, or metal-edged ruler to keep lines straight. Blue Guide Arrows are provided where possible, however, there are fold lines that arrows cannot be placed on, so look closely for those.

Cut out parts using a good sharp modeling knife. Cut all Red lines as they indicate additional cuts needed.

Caution/Disclaimer: Use of sharp modeling knives should not be allowed by children unsupervised!



Before assembling (gluing) parts; always color all cut edges and fold lines to eliminate the white lines left by the uncolored paper. Avoid using dark permanent markers; instead use highlighter type markers for a more natural look. Use Gray for Black and dark areas, and try to match other colors where possible. This makes for a much more realistic model.

Assemble upper portion of unit as shown:

1. Fold all score lines on the Box before cutting and gluing any parts. Cut out Box, but leave the 4 wedge shape wheel well areas in place for now. Make sure to cut all additional Red lines.




2. Fold the sides over and glue the overlapping areas along the length of the bottom to form a "recessed" belly area




3. Now go and cut out the 4 wedge areas (which are now 2 layers thick glued together). Color exposed edges with highlighter marker





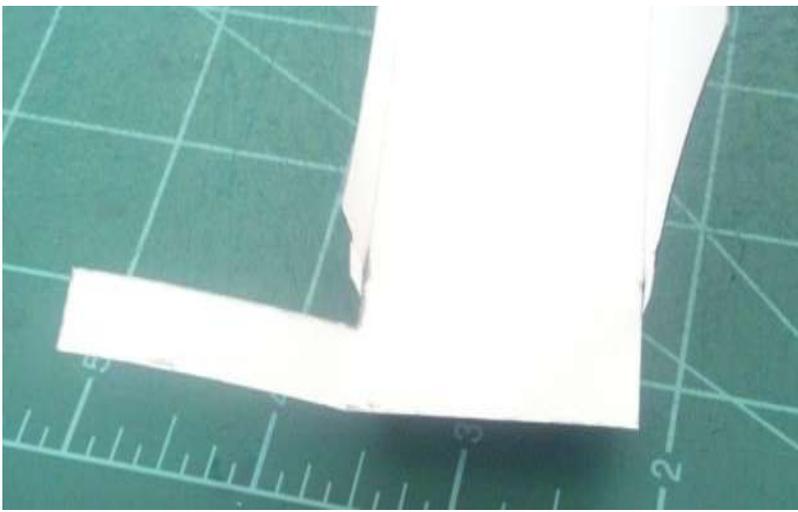


4. Fold over and glue interior of each end to back of the exterior ends.

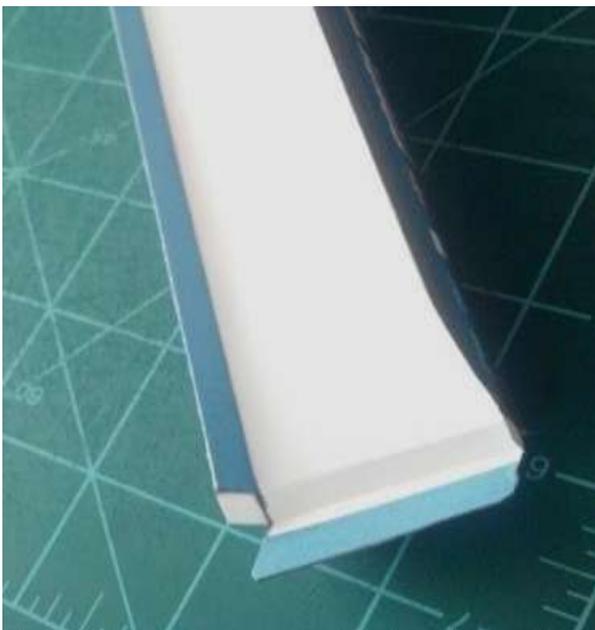


5. Fold and glue interior of both sides to inside walls, then glue floor down on to bottom.

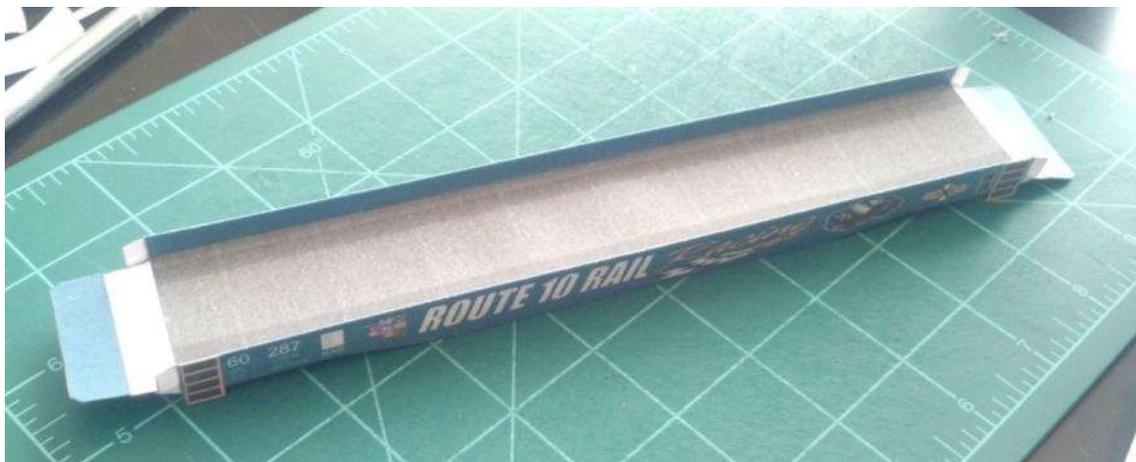

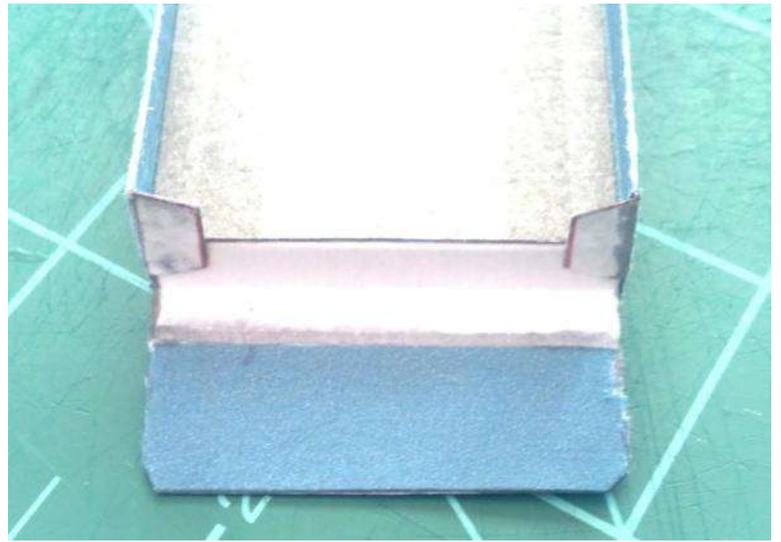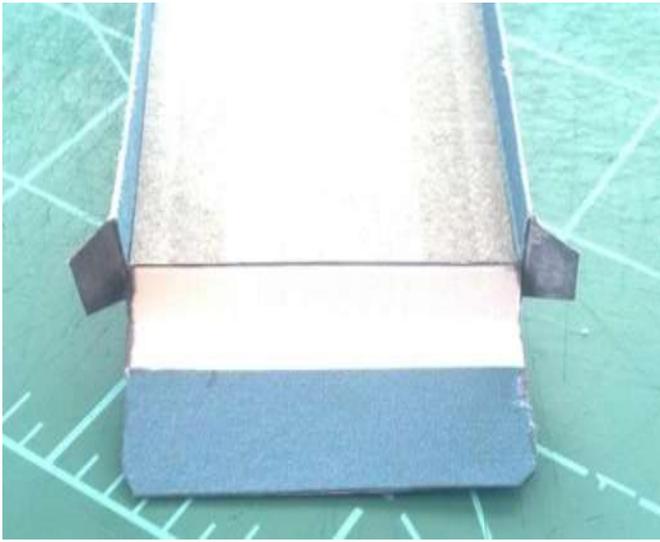


6. Finish up the ends. Color the back of the ears on the end sides – these will be visible when done. Then glue ears back to the section flush with the floor so the sides are set vertically. Then fold up and glue the rest of the end into place.

Assemble the Cars:

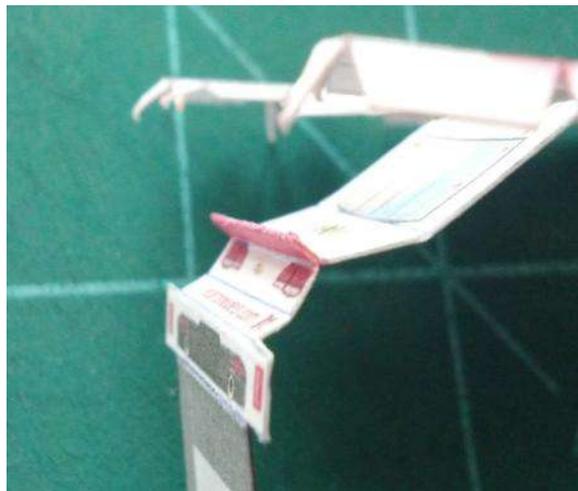

1. Score and cut out parts, color edges as needed. Start by folding over and gluing the rear spoiler as shown on the right. This is to give it time to set and dry while working on the front end.

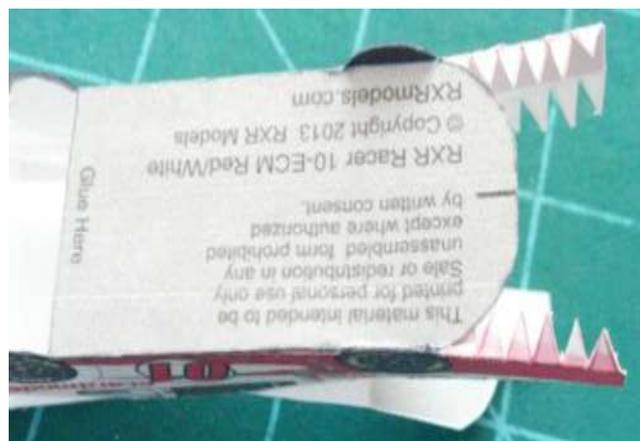

2. Take the separate underside piece and start by gluing to one side aligning the inner tire ear to the exterior facing tire. Then repeat to attach to the opposite side of the car.



3. Glue the nose tabs to the bottom to form the front curves. The two nose flaps will meet at the front center mark. Then fold and glue down the rest of the front one section at a time. Windshield first, then glue and secure the hood.



4. Fold and glue down the tab on the front. This helps make the front stronger and properly aligned. Curve the Front Grille to get ready to apply.



5. Apply the Front Grille as shown. Notice there will be a gap on the bottom side between the Nose and the Grille. This is to allow adjustment if needed to get the Grille aligned somewhat vertically. After setting the Grille, just add some glue filler in the corners on the underside for stability.



6. With the front complete, finish the rear. Start by doing the Rear Window, followed by the Trunk Lid.




7. Glue and set the Rear Bumpers then complete the underside by folding and gluing the remaining flap with the inner tire ears and align tire ears to the exterior of the tires. Fold the Rear Bumper side flaps around the body and you're done. Repeat for the other cars.



Assemble the Toolbox if desired:



1. Score and cut out the box. Start by folding and gluing the top Rails that extend above the roof.

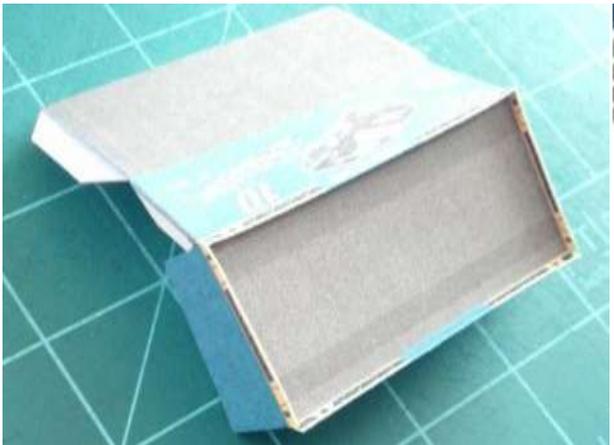

2. Once the rails are set, complete the box by folding everything lengthwise, then attaching the ends.

Slip completed Hauler and Accessories onto an assembled RXR 60ft Flatcar (Sold separately). The top unit should slide easily, but snugly onto the Flatcar assembly. Gluing is NOT necessary or recommended. This will allow you to change or remove tops easily if you want to swap tops or use Flatcar alone later.

Enjoy!!



RXR 60ft Racing Hauler

© Copyright 2013 – RXR Models – www.RXRmodels.com



This material and all Model Part Design Sheets are intended to be printed for personal use only. The sale or redistribution in any unassembled* form prohibited except where authorized by written consent.

*Redistribution of fully assembled (completed) models is permitted provided design, copyright, website, and disclaimer found on underside of model are not removed or altered.